

Internship location: Soft Matter Sciences and Engineering Lab (SIMM) – ESPCI – UMR7615

Industrial partnership: Becton Dickinson => funding : yes

Possibility for a Doctoral thesis: CIFRE

Internship supervisors Emilie Verneuil - emilie.verneuil@espci.fr, 01 40 79 47 42

M2 Internship


Flows in ultra-thin polymer films

Coatings of liquids on surfaces such as glass are commonly used in manufacturing processes. For instance, the inside of glass syringes can be coated by liquid silicone to promote lubrication of the plunger, or in between fibers of insulation wool to enhance their mechanical strength via capillary bridges. The stability and homogeneity of these liquid films is of course crucial to these applications. In the case of silicone oils coating glass, a rough estimate of the long-range interactions such as Van der Waals' shows that such films should bear a uniform thickness at equilibrium: repulsive interactions should tend to a flat thick film. However, in practical situation, initially heterogeneous films never get uniform in thickness in a timely manner. As examples, defects on glass substrates lead to thickness heterogeneities that grow over time rather than heal (Fig. left). When starting from a collection of droplets sprayed onto a flat substrate (shown as dark blue disks in the Fig. right), a nanometer-thick film first spreads around the droplets (shown in yellow and turquoise), and delays the spreading and coalescence of the droplets.

The goal is to gain insights into the behavior of silicone oil on glass and to elucidate the mechanisms underlying the time evolution of such coatings. To do so, model systems will be used (plane glass or silicon wafers, well-characterized polymers), and experiments will be performed in order to measure the thickness profiles over time with advanced imaging techniques. Modelling of the transfers will then be developed to account for the data.

Two cases will be particularly studied (see Figures)

- Time evolution of oil spread onto substrates decorated with well-controlled defects
- Spreading dynamics of several droplets deposited on smooth substrates.

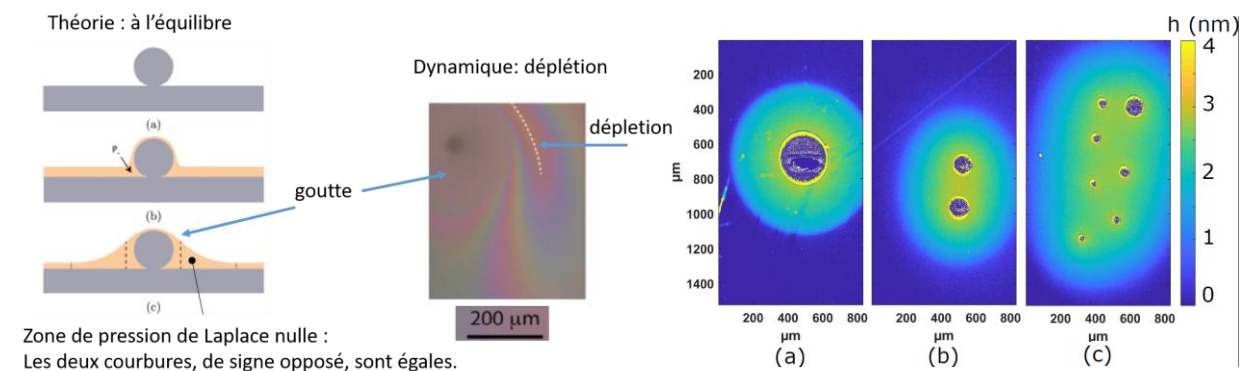

(left) Liquid suction around a topological defect on the glass surface. (center) White light reflection image (Newton rings) showing the accumulation of liquid around the defect and the depletion around this drop in the transient regime. (right) Thickness mapping obtained by ellipsometric microscopy around drops deposited on an oxidized silicon wafer. A nanometric film develops between the drops before they merge.

Speciality : Soft matter Physics, Physics of liquids

Techniques/methods in use: interferometry, ellipsometry

Applicant skills: taste for experimentation